




Using Smart Life App

Vodič za uporabo
User Manual

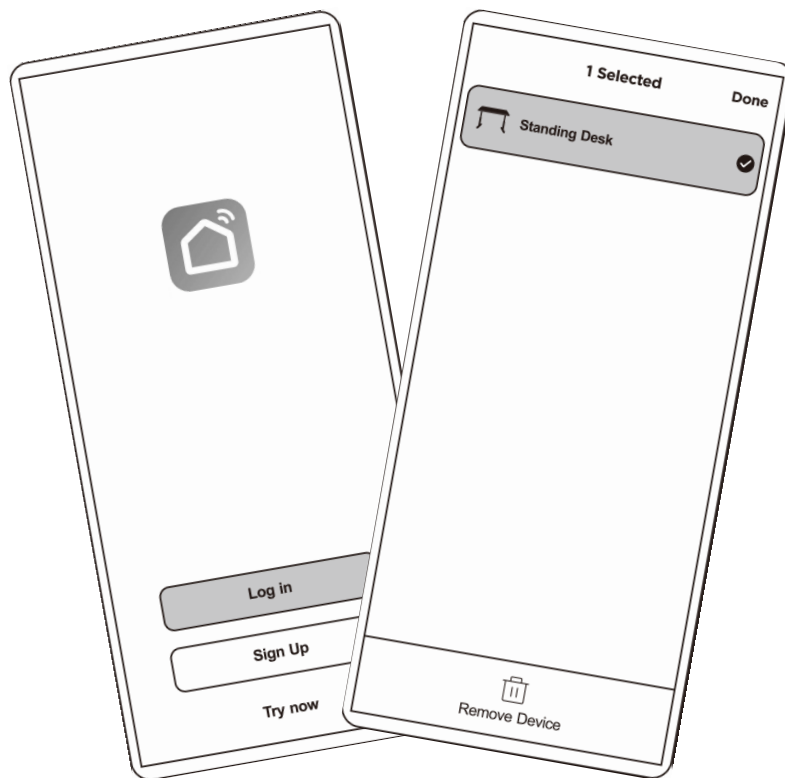

Ostali vodiči za sestavo so na voljo na UVI.gg/ag ali preko QR kode!
Other Assembly Guides are available at UVI.gg/ag or via the QR code!



1


App for Sit-Stand Desk

Priročnik je namenjen le kot ponazoritev, dejanska različica aplikacije se lahko razlikuje. Prenesite aplikacijo **Smart Life** iz trgovine **Google Play**, **Apple App Store** ali pa skenirajte QR kodo na desni strani in jo namestite.

The guidebook is for illustration purposes only and the latest App version may vary. Download the **Smart Life App** from **Google Play**, **Apple App Store**, or scan the QR code on the right side to install it.



Povezava s Sit-Stand mizo / Connecting to Sit-Stand Desk

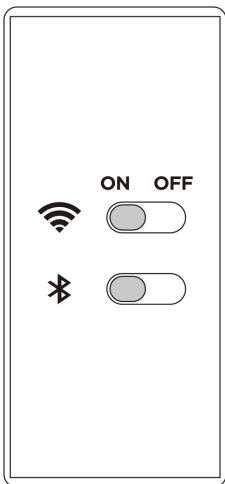


Vklopite Bluetooth in Wi-Fi na telefonu ter se prepričajte, da je povezan z brezžičnim omrežjem.

Turn on Bluetooth and Wi-Fi on your phone and make sure it is connected to a Wi-Fi network.




Prijavite se s svojo telefonsko številko in prejeto potrditveno kodo, nato sledite navodilom na zaslonu.

Sign in with your phone number and a verification code, then follow the on-screen instructions.

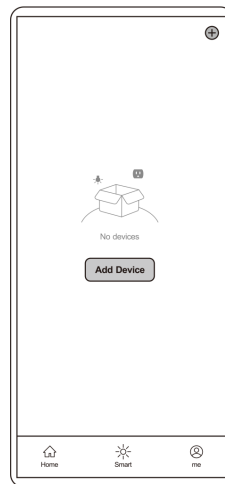


Tapnite »Dodaj napravo« ali ikono »+« v zgornjem desnem kotu, da odprete stran za izbiro naprave.

Tap "Add Device" or the "+" icon in the upper right corner to enter the device selection page.

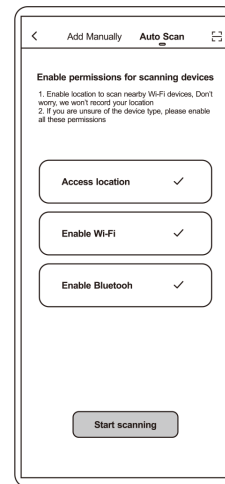

Tapnite »Auto Scan« in omogočite vse potrebne pravice (Dostop do lokacije, Omogoči Wi-Fi, Omogoči Bluetooth) preden izberete »Start Scanning«.

Tap "Auto Scan" at the top and enable all required permissions (Access Location, Enable Wi-Fi, Enable Bluetooth) before tapping "Start Scanning."

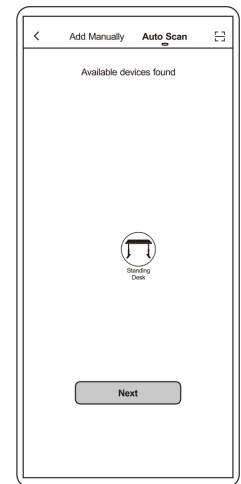


Na seznamu izberite »Dvižna miza (Standing Desk)« in tapnite »Naprej (Next)«.

Tap "Standing Desk" in the Auto Scan list and then select "Next."




Izberite svoje Wi-Fi omrežje, vnesite geslo in tapnite »Naprej (Next)«.

Choose your Wi-Fi network, enter the password, and tap "Next."

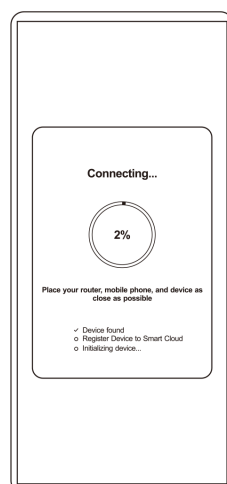


Naprava bo dodana samodejno v 10 do 60 sekundah.

The device will be added automatically within 10 to 60 seconds.

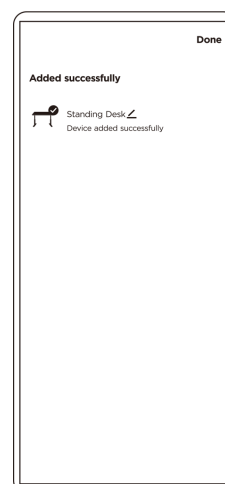

Ko je naprava povezana, tapnite ikono, da odprete nadzorno ploščo mize (Standing Desk Dashboard). Ime naprave lahko spremenite s tapom na ikono svinčnika.


Once the device is connected, tap it to open the Standing Desk Dashboard. You can rename your device by tapping the pencil icon.

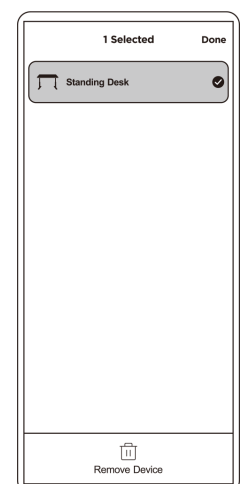

Za prekinitev povezave pritisnite in držite napravo na začetnem zaslonu.

To disconnect the device, long press it on the main screen.

Povezava s Sit-Stand mizo / Connecting to Sit-Stand Desk

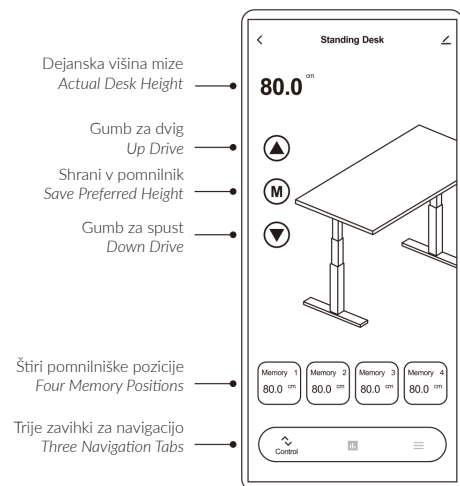


Stran za nadzor:

- Držite gumb gor/dol (Up/Down), da dvignete ali spustite mizo.
- Za shranjevanje trenutne višine pritisnete »M«, nato izberite eno od štirih pomnilniških pozicij.
- Za pomik mize na shranjeno višino pritisnete ustrezeni pomnilniški gumb.

Control Page:

- Long press and hold the Up/Down button to raise or lower the desk.
- To save the current height, press the "M" button, then select one of the four memory positions.
- To move the desk to a saved position, press the corresponding memory button for that height.

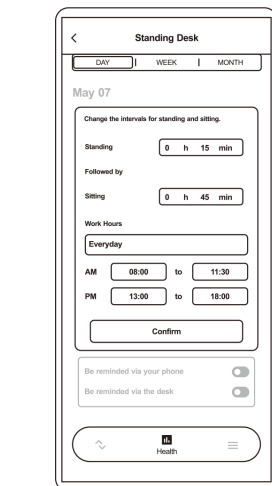


Stran za zdravje:

- Na strani »Dan (Day)« lahko nastavite intervale za sedenje in stoje ter določite delovni čas mize.

Health Page:

- The "Day" page allows you to set intervals for standing and sitting, as well as your working hours.

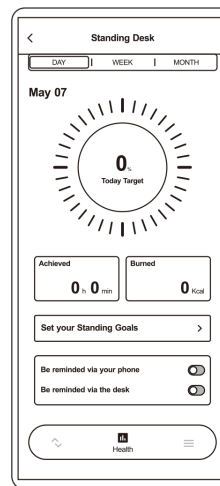

Opomniki

Preko telefona / via the Phone: telefon vas opozori z vibracijo, ko je čas za spremembo položaja / your phone will buzz when it's time to change position


Preko mize / via the Desk: nadzorna plošča vas opozori z zvočnim signalom (piskom) / the control panel will emit beep sounds as a reminder

Pregled statistike:

- Preklapljate lahko med zavihki dan, teden in mesec, da vidite svoje statistike.
- Na strani »Dan (Day)« lahko vidite svoj čas stoje in porabljene kalorije. Prav tako lahko nastavite cilje in način opomnika.


Statistics Overview:

- Navigate through the three tabs at the top to view your daily, weekly, and monthly statistics.
- The "Day" page shows your standing time and calories burned. You can also set standing goals and choose your reminder type

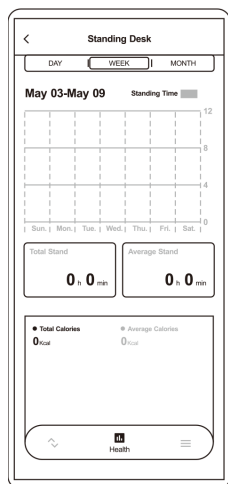

Strani »Teden (Week)« in »Mesec (Month)« prikazujeta dnevni čas stoje in skupno porabo kalorij.

The "Week" and "Month" pages show an overview of your daily standing time and total calories burned.

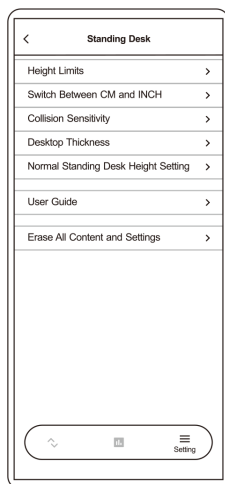

Stran z nastavitvami:

- Na tej strani lahko spreminjate različne nastavitve mize in aplikacije.
- Če imate težave, si oglejte uporabniški priročnik za pomoč.

Setting Page:

- In this page, you can customize various desk and app settings.
- If you encounter any issues, please refer to the User Guide for assistance.


Opomba / Note:

- Ko prvič povežete telefon z mizo, se prikaže pojavno obvestilo, ki vas opomni, da nastavite čas opomnika ob prvem vstopu na stran Health v aplikaciji. Ko pritisnete »Potrdi«, bo miza začela odštevanje časa.
- Če se miza odklopi iz omrežja Wi-Fi, se beleženje časa stoje samodejno zaustavi in nadaljuje šele, ko se miza znova poveže z brezžičnim omrežjem.
- Če pride do izpada električne energije ali če je miza izklopljena iz napajanja, se dnevna statistika stoje izbriše. Ko se napajanje ponovno vzpostavi, se prikaže pojavno obvestilo, ki vas opomni, da znova nastavite čas opomnika ob vstopu na stran Health. Po pritisku na »Potrdi« bo miza ponovno zagnala časovnik.
- Ko je na upravljalni plošči mize aktivirana funkcija zaklepanja, se zaslon aplikacije zatemni in miza ne bo sprejemala ukazov iz aplikacije. Za ponovno upravljanje mize prek aplikacije izključite funkcijo zaklepanja na upravljalni plošči tako, da 3 sekunde držite gumb »M«. Nato bo aplikacija ponovno omogočila upravljanje mize.
- When you connect your phone to the desk for the first time, a pop-up notification will appear reminding you to set a reminder time when you first access the App's Health Page. After you press "Confirm", the desk will start the timer.
- If the desk disconnects from the Wi-Fi network, the recorded standing time will automatically pause and resume only once the desk reconnects to the wireless network.
- If the desk loses power or is unplugged, the standing statistics for the day will be cleared. Once power is restored, a pop-up notification will appear reminding you to set a reminder time when you access the Health Page. After you press "Confirm", the desk will start the timer again.
- When the locking function on the desk's control panel is activated, the App interface will darken and the desk will not respond to commands from the App. To regain control, deactivate the locking function on the desk's control panel by pressing "M" for 3 seconds. The Smart Life App will then be able to control the desk again.

3


App for Sit-Stand Desk

Navodila za upravljanje doma / Home Management Instructions

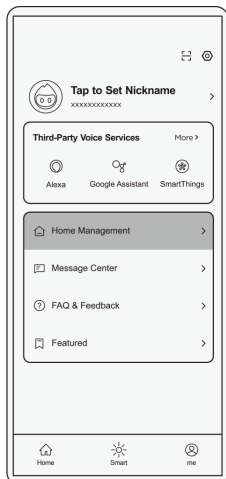


Na dnu tapnite "Jaz", nato izberite "Upravljanje doma."

Tap "Me" at the bottom, then tap "Home Management."

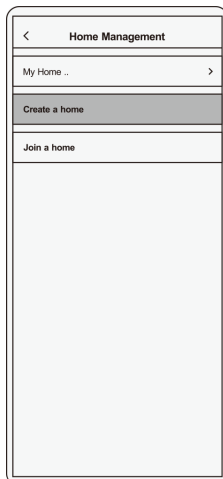

Tapnite "Ustvari dom."

Tap "Create a Home."

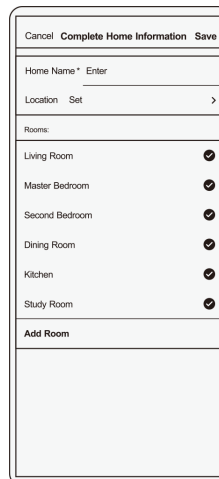

Izpolnite podatke za nov dom in jih shranite.

Fill in the new Home information and save it.

Opomba / Note:


Ime doma je obvezno in lahko vsebuje največ 25 znakov.

The Home name is required and can have a maximum of 25 characters.



Izberite dom, ki ste ga pravkar ustvarili, s seznama.

Select the Home you just created from the list.

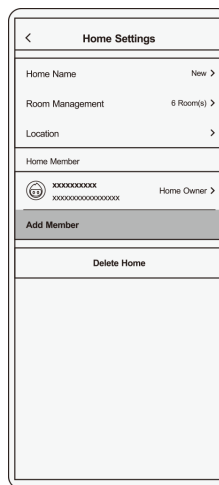

Tapnite "Dodaj člana", da dodate druge uporabnike v dom. Povabljeni uporabnik bo prejel obvestilo v aplikaciji in bo lahko upravljal napravo, ko sprejme povabilo.

Tap "Add Member" to add other users to your Home. The invited user will receive a notification in the app and will be able to control the device after accepting the invitation.

Opomba / Note:

Naprave ne more uporabljati več uporabnikov hkrati, razen preko funkcije Upravljanje doma. Prejšnji uporabnik mora napravo odklopiti v aplikaciji (ali držati gumb "Set" na daljinskem upravljalniku 5 sekund, da se odklopi) pred povezavo novega uporabnika.

A device cannot be connected by multiple users at the same time, except through the Home Management function. The previous user must disconnect the device in the app (or long-press the remote "Set" button for 5 seconds to disconnect) before a new user can connect.