




# UVI Sit-Stand Double Frame

## Assembly Guide

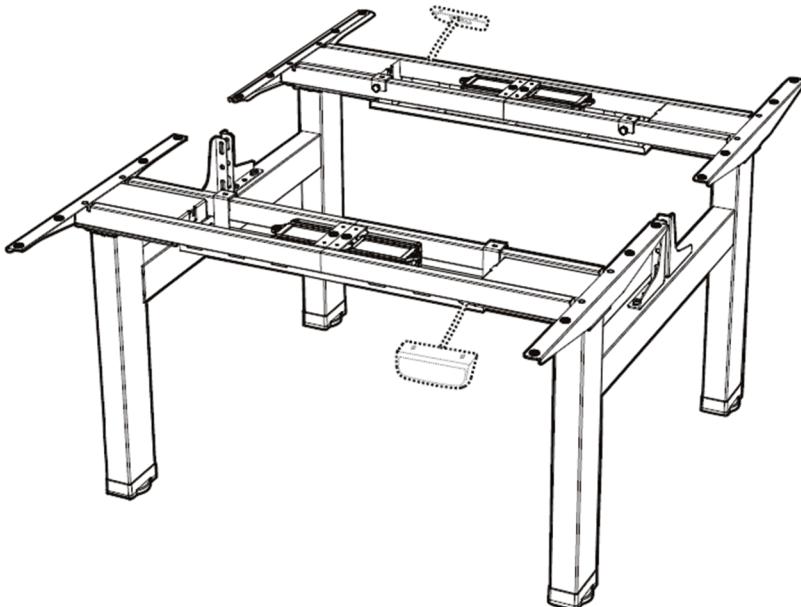

You can find assembly guides in other languages at:  
[UVI.gg/AG](http://UVI.gg/AG) or via the QR code!



**EN**  Read the entire instruction manual before you start installation and assembly. If you have any questions regarding any of the instructions or warnings, please contact your local distributor for assistance.

**CAUTION:** Use with products heavier than the rated weights indicated may result in instability causing possible injury.

- Please closely follow the assembly instructions. Improper installation may result in damage or serious personal injury.
- Safety gear and proper tools must be used. This product should only be installed by professionals.
- Make sure that the supporting surface will safely support the combined weight of the equipment and all attached hardware and components.
- Use the mounting screws provided and DO NOT OVER TIGHTEN mounting screws.
- This product contains small items that could be a choking hazard if swallowed. Keep these items away from children.
- This product is intended for indoor use only. Using this product outdoors could lead to product failure and personal injury.

**IMPORTANT:** Ensure that you have received all parts according to the component checklist prior to installation. If any parts are missing or faulty, contact your place of purchase for a replacement.

**MAINTENANCE:** Check that the product is secure and safe to use at regular intervals (at least every three months).

**SLO**  Pred sestavo in montažo preberite celotni vodič za sestavo. Če imate kakšnakoli vprašanja glede navodil ali pa opozoril, prosimo kontaktirajte vašega lokalnega distributerja za pomoč.

**PREVIDNO:** Uporaba izdelka z večjimi težami kot pa so predpisane lahko povzroči nestabilnost in resne telesne poškodbe.

- Nosilci morajo biti pritrjeni kot je navedeno v navodilih za sestavo. Nepravilna montaža lahko povzroči škodo ali resno telesno poškodbo.
- Uporabljena mora biti varnostna zaščita in pravilna orodja. Ta izdelek lahko namesti samo profesionalno osebje.
- Prepričajte se, da bo podporna površina prenesla vso težo opreme in vso povezano strojno opremo in druge komponente.
- Uporabite nosilne vijke, ki so že v paketu in vijke NE PRIVIJTE PREVĒC.
- Izdelek vsebuje majhne predmete, ki lahko predstavljajo nevarnost zadušitve. Držite te predmete stran od otrok.
- Izdelek je namenjen samo notranji uporabi. Uporaba izdelka zunanj lahko privede do kvarjanja izdelka ali pa do telesne poškodbe.

**POMEMBNO:** Prepričajte se, da ste v paketu prejeli vse dele glede na kontrolni seznam predmetov. Če kakšni deli manjkajo ali pa so poškodovani, stopite v stik z vašim lokalnim distributerjem za zamenjavo.

**VZDRŽEVANJE:** Preverite varnost okvirja v rednih intervalih (vsaj vsake tri mesece).

Slovenska navodila lahko najdete na spletni strani UVIDesk.com/AG.

**HR**  Prije montaže pročitajte cijeloviti vodič za montažu. Ako imate bilo kakvih pitanja u vezi s uputama ili upozorenjima se za pomoć obratite lokalnom distributeru.

**OPREZ:** Korištenje proizvoda većim od propisane težine može uzrokovati nestabilnost i ozbiljne ozljede.

- Nosiči moraju biti uvrščeni kako je naznačeno u uputama za montažu. Nepravilna montaža može uzrokovati oštećenja ili ozbiljne ozljede.
- Mora se koristiti sigurnosna zaščita i pravi alati. Ovaj proizvod smije instalirati samo profesionalno osoblje.
- Osigurajte da će nosilca površina nositi svu težinu opreme i sav harder i ostale komponente.
- Upotrijebite pričvršćene vijke koju su već u pakiranju i vijke ne PRITEGNITE PREVIŠE.
- Proizvod sadrži male predmete koji mogu predstavljati opasnost od gušenja. Držite te predmete dalje od djece.
- Ovaj je proizvod namijenjen samo za internu upotrebu. Korištenje proizvoda izvana može dovesti do oštećenja proizvoda ili ozljede.

**VAŽNO:** Provjerite jesu li svi predmeti u pakiranju prema popisu predmeta. Ako neki dijelovi nedostaju ili su oštećeni, обратите se lokalnom distributeru za zamjenu.

**ODRŽAVANJE:** Provjerite sigurnost okvira u redovitim intervalima (najmanje svaka tri mjeseca).

Hrvatske upute možete pronaći na web stranici UVIDesk.com/AG.

**DE**  Bitte vor Beginn der Montage und Zusammenbau das ganze Handbuch durchlesen. Bitte sich mit dem Händler vor Ort bei Fragen zur Anleitung oder Warnungen in Verbindung setzen.

**VORSICHT:** Bei Verwendung mit Produkten, die das zulässige Gewicht überschreiten, können Schaden oder möglicherweise Verletzungen die Folge sein.

- Halterungen sollen entsprechend den Montageanweisungen angebracht werden. Eine unsachgemäße Montage kann Schäden oder Verletzungen zur Folge haben.
- Sicherheitsausrüstung und geeignete Werkzeuge verwenden. Die Montage des Produktes sollte nur von Fachleuten durchgeführt werden.
- Die tragenden Oberflächen sollten das gesamte Gewicht von Garünen und allen zusätzlichen Bauteilen sicher aushalten können.
- Nur die mitgelieferten Einbauschrauben und die Schrauben NIGHT ZU FEST ANZIEHEN.
- Dieses Produkt enthält Kleinteile, die Erstickungsgefahr beim Verschlucken hervorrufen können. Diese Teile von Kindern fernhalten.
- Dieses Produkt nur in Innenräumen verwenden. Verwendung des Produktes im Außenbereich kann zu Verletzungen und Schäden führen.

**WICHTIG:** Var der Montage bitte alle erhaltenen Bauteile mit der Bauteilliste abgleichen. Bei beschädigten oder fehlenden Teilen den Händler vor Ort nach Ersatzteilen fragen.

**WARTUNG:** Die Haltenngsklammer regelmäßig auf Sicherheit und Stabilität prüfen (am besten alle drei Monate).

**FR**  Lisez entièrement le guide d'utilisateur avant de commencer l'installation et le montage. Si vous avez des questions concernant les instructions ou les avertissements, veuillez contacter votre distributeur local pour une assistance.

**ATTENTION:** L'utilisation de produits plus lourds que les poids nominaux indiqués peut entraîner une instabilité causant des blessures potentielles.

- Les supports doivent être joints comme spécifié dans les instructions de montage. Une mauvaise installation peut entraîner des dommages ou de graves blessures aux personnes.
- Un équipement de sécurité et les outils appropriés doivent être utilisés. Ce produit devrait être installé uniquement par des professionnels.
- Assurez-vous que la surface de soutien supporte en sécurité le poids combiné de l'équipement et de tous les matériaux et composantes associés.
- Utilisez les vis de montage fournies et NE SERREZ PAS TROP les vis de montage.
- Ce produit contient de petites pièces qui peuvent causer un étouffement si elles sont avalées. Eloignez ces pièces des enfants.
- Ce produit est prévu uniquement pour une utilisation à l'intérieur. L'utilisation de ce produit à l'extérieur peut entraîner une défaillance du produit ou des blessures aux personnes.

**IMPORTANT:** Avant l'installation, assurez-vous que vous avez reçu toutes les pièces selon la liste de vérification des composants. Si une pièce est manquante ou endommagée, téléphonez à votre distributeur local pour qu'il la remplace.

**MAINTENANCE:** À intervalles réguliers (au moins tous les trois mois) vérifiez que le support est d'utilisation sûre et fiable.

## Preface

This electric height adjustable standing desk consists of a heavy-duty steel desk frame and a motorized height adjustment system. Please read and completely understand this manual before installation in order to make sure the safe and correct use of the system and maintain the longevity of the overall construction and the built-in electronics.

## Instructions of Safety and Warnings:

- Any failure to comply with the safety and installation instructions in this manual may cause serious bodily injury.
- Any incomplete observation of the instructions, warnings and additional information marked with the "Note" may result in serious damage to the system or its components.
- This product can be used by children aged from 8 years and above if they have been given supervision or instruction concerning use of the appliance in a safe way and understand the hazards involved. Children should not play with the product. Cleaning and user maintenance should not be made by children without supervision. Unplug the desk when the system isn't in use, and place the power plug out of childrens reach.
- People with reduced physical, mental abilities and or lack of experience and knowledge must not use the product, unless they're under supervision, understand the hazards involved or they have been thoroughly instructed in the use of the apparatus by a person who is responsible for the safety of these persons.
- Users should make sure that they never sit on the desktop in order to prevent serious bodily injury.

## Electrical Safety Instructions:

The product is powered by electricity. In order to avoid burns, fire and electric shock, please read the instructions carefully.



Don't clean the product with water while the power is still connected.



Never operate the system if it's in moist environment or its electrical components have contact with liquids.



Don't disassemble or replace components while the power is still connected.



Don't operate the system if the control box makes noise or odor. Alterations of the given power unit and control box aren't allowed.



Never operate the system with a damaged cord or plug. Please contact your point of purchase to replace the damaged parts.

## Other Safety Instructions:

- Clear up all obstacles within the height adjustment range.
- Don't leave the cords or plug unorganized in order to prevent tripping hazards.
- Any attempts to reconstruct the desk frame aren't allowed.
- Don't add anything to the adjustable junctions of the desk frame.
- Outdoor use is prohibited.

## 3

## UVI Sit-Stand Double Frame

## Preparation

- 1 What are the specifications you need to know?



Weight capacity  
2x 100kg



Power Input  
100-240V



Operation temperature  
-5°C - +40°C

- 2 Tools required during installation.



Bubble level



Allen Wrench (included)




Drill



Phillips Screwdriver

- 3 Recommended protection.



A Shipping Blanket  
to protect the deck  
and the floor

- 4 Things you need to know before installation.

Please check all of the components shown in the component checklist. If any of the components are missing or damaged, contact your point of purchase for a replacement.



**Disposal:** The product with this mark indicates that this product shouldn't be disposed with other household wastes throughout the EU. To prevent possible harm to the environment or human health from uncontrolled waste disposal, recycle it responsibly to promote the sustainable reuse of material resources. To return your used device, please use the local recycle service or contact your point of purchase to withdraw the product.


## Checklist and Installation

				The picture of the controller is for your reference only. Actual product may vary. 

## Attaching Side Brackets

 <b>S-A (x32)</b> Hex Head Screw	 <b>S-B (x20)</b> Phillips Head Screw + 1 Spacer	 <b>S-C (x4)</b> Phillips Head Screw	 <b>S-D (x4)</b> Phillips Head Screw
 <b>S-E (x8)</b> Phillips Head Screw	 <b>S-F (x8)</b> Hex Head Screw	 <b>S-G (x8)</b> Hex Head Cap Nut	 <b>S-H (x6)</b> Cable Clip
 <b>S-I (x20)</b> Anti-Vibration Pad	 <b>S-J (x1)</b> 4mm Allen Wrench	 <b>S-K (x1)</b> 5mm Allen Wrench	

## Now let's begin the installation Attaching Side Brackets

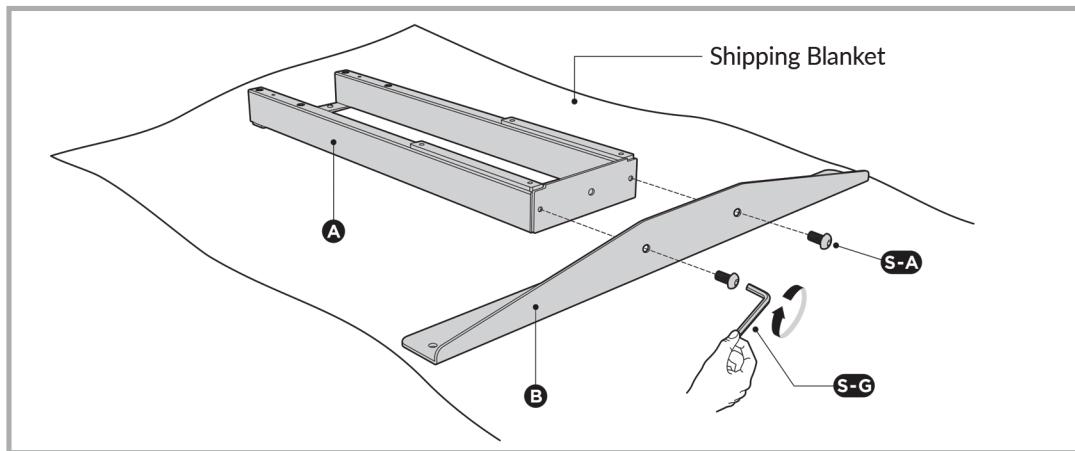



- Please prepare a spacious area for installation, and put a shipping blanket on the are to prevent scratches on the floor and the frame.
- Unpack the crossbar A and carefully place it on the floor. Attach the side brackets B to the end of the crossbar A, using the hex head screws (S-G) and hex head cap nuts (S-A).
- Repeat the same process to assemble other three side brackets.

*Note: The drawings of both of the crossbar and the side brackets are the backside of the components. During the installation, please make sure the crossbar and the side brackets keep facing down, which will be convinient for further steps.*


## 5

## UVI Sit-Stand Double Frame



## Drilling Mounting Holes

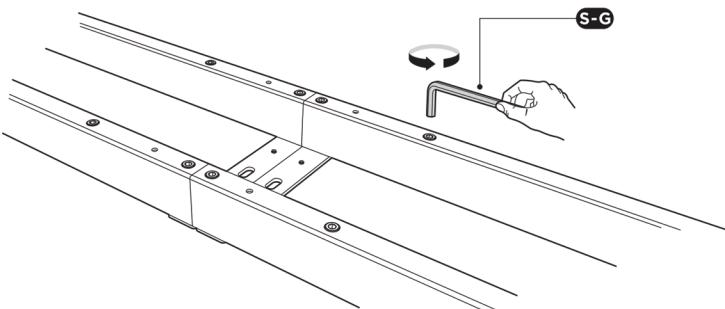

Loosen the hex head screws that fix the adjustable junction, but don't completely take out the screws.

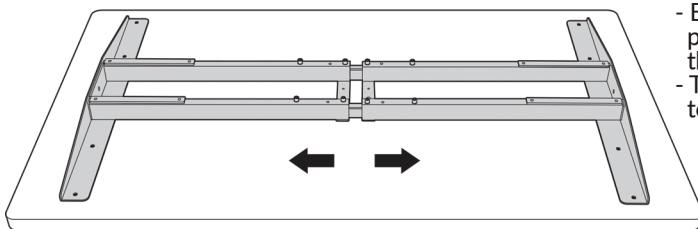



- Place the assembled frame on the back of the tabletop.
- Ensure that the frame is placed in the center of the table.
- Then adjust the frame to suit the size of the desktop.

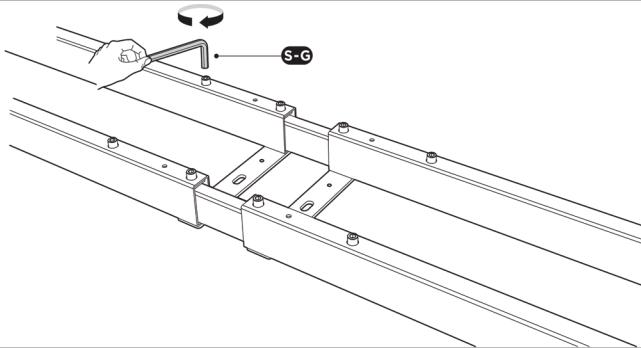

Retighten all the hex head screws to finish the adjustment.



## 6

## UVI Sit-Stand Double Frame

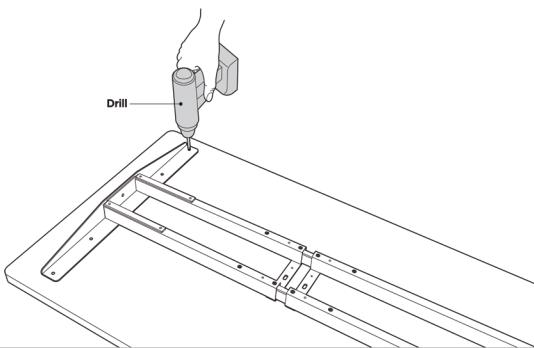

After tightening the screws, use a drill to make mounting holes on the backside of the tabletop through the 8 mounting holes on the side brackets.

Note: The depth of the mounting holes should be over 10 mm and the diameter should be less than 3 mm

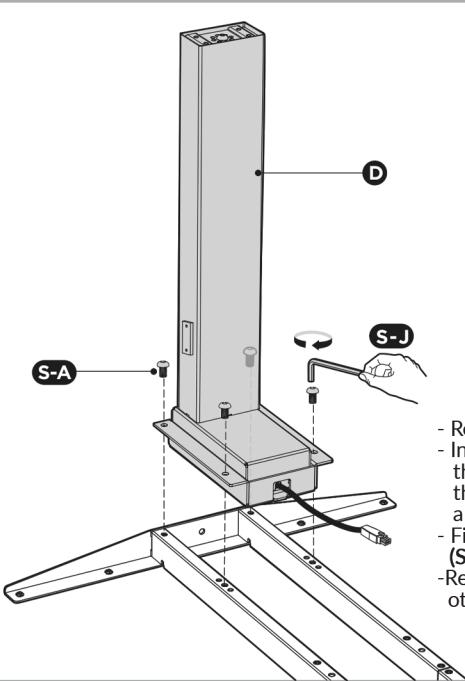


- Remove the tabletop for further installation
- Insert one lifting column into one end of the crossbar with the head of the lifting column facing inward. Make sure the mounting holes on the lifting column completely align with the screw holes on the crossbar.
- Fix the lifting column D with crossbar with 4 screws (S-A) with the Allen wrench (S-J).
- Repeat the same process to assemble the other three lifting columns.

## Attaching Connection Kit


Align the mounting holes on the two connection kits with the screw holes on the two connection plates of the lifting columns.

- Attach the connection kits (L) to the lifting columns using 4 screws (S-A) with the allen wrench (S-J).
- Repeat the same process to assemble the other two connection kits.

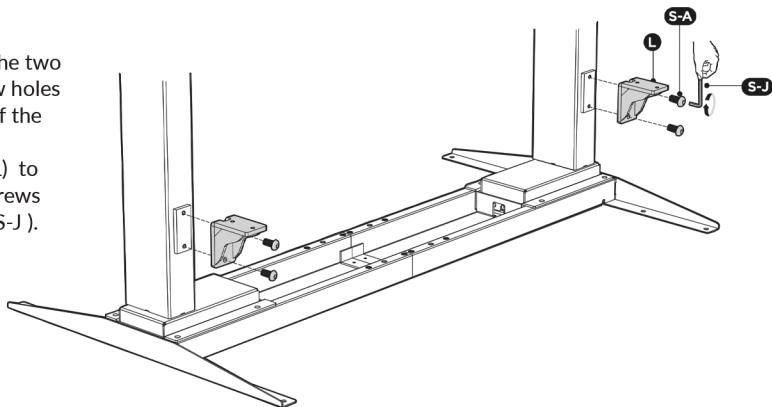



## Assembling the Connection Bars

- Align the 8 mounting holes on the two connection bars with the crew holes on the connection kits.
- Attach the connection bars (I) to the connection kits (L) using 8 screws (S-A) with the Allen wrench (S-J).

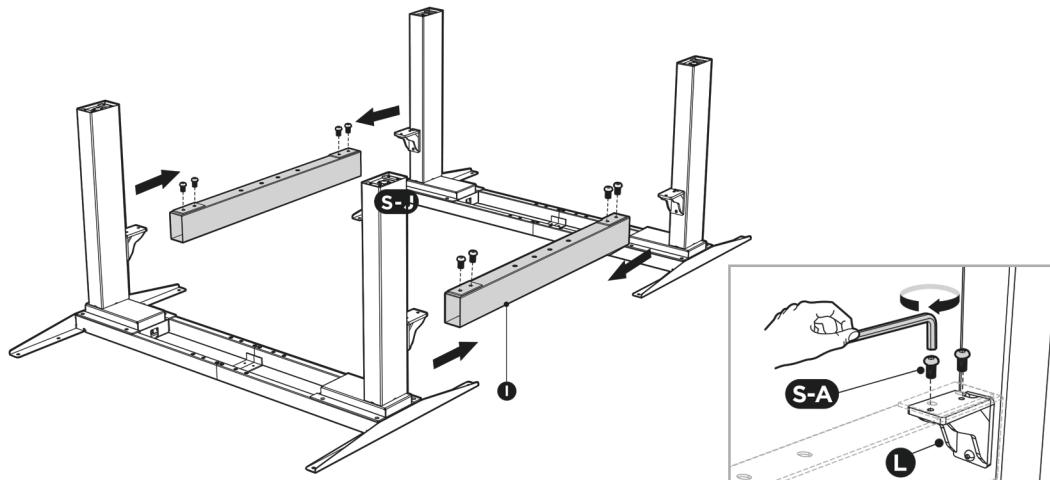

## 8

## UVI Sit-Stand Double Frame

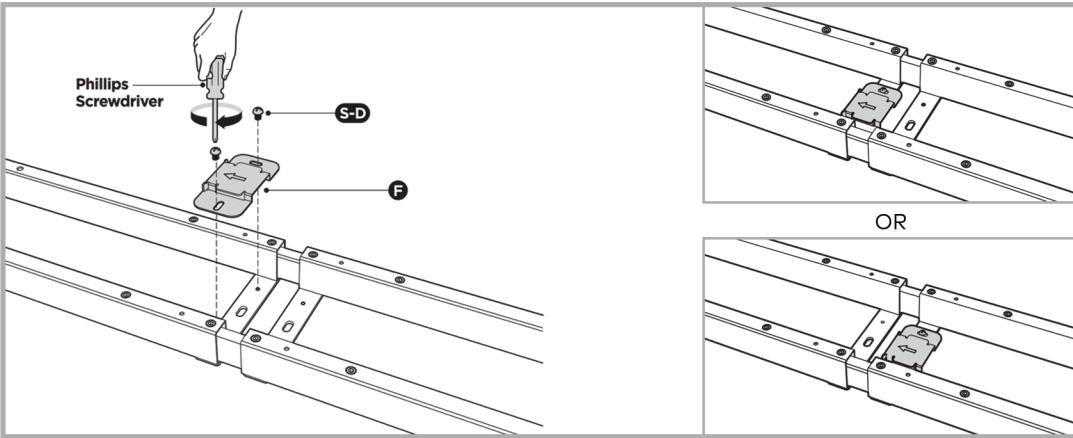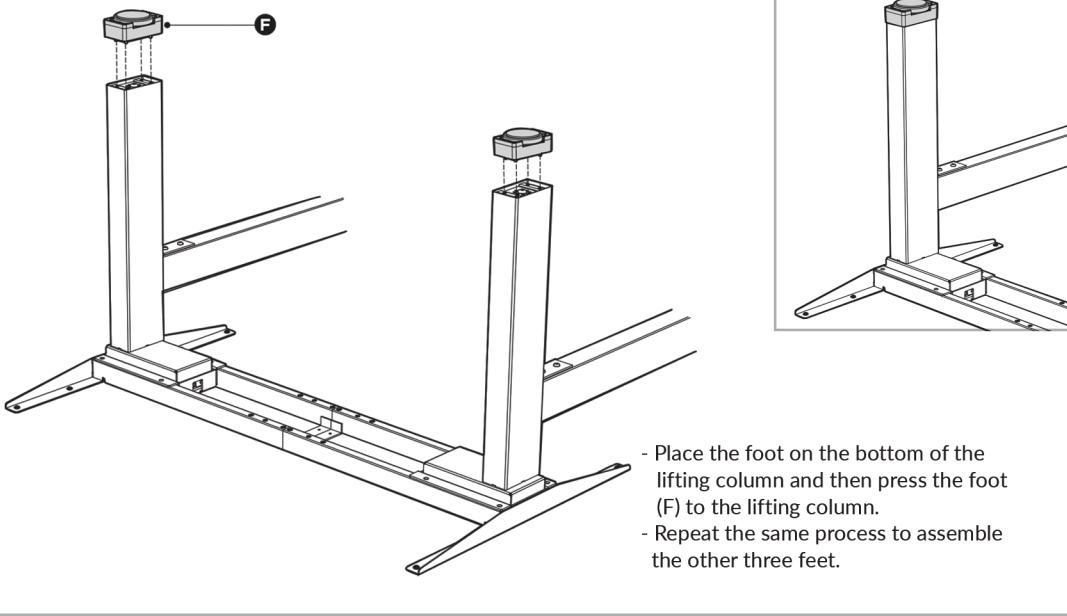


- Align the mounting holes on the fixing plate with the crew holes as shown.
- Attach the fixing plate G on the center of the crossbar with 2 screws (S-D) using a Phillips screwdriver.

Note: The Arrow on the fixing plate indicates the direction of sliding in the control box. Follow the direction of the arrow to mount the control box in the next step.


## Attaching Privacy Panel Support Kits

Turn over the desk frame with the crossbar facing up. At least two people are required when turning over the desk frame.

Attach privacy panel support kits (M) with 8 hex head screws (S-F) and 8 hex head cap nuts (S-G) using the Allen Wrench (S-K).

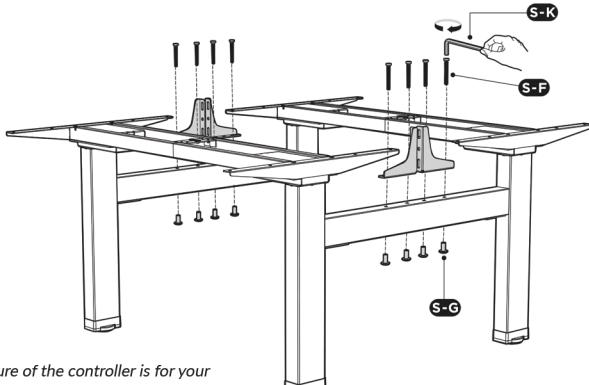

*Note: The picture of the controller is for your reference only. Actual product may vary.*








## Attaching the Control Box

- Connect the two extension cords (N) with the two motor cords
- Connect the to the ports on the right marked "M1" and "M2".
- Connect the controller (O) cord to the port marked "P2".
- Insert the power plug (K) on the port on the left marked "AC".
- Repeat the same process to assemble the control box (H).


*Note: Please make sure the slot on the control box is facing upward.*

*There is no corresponding relation between the two motor ports and the two lifting columns.*

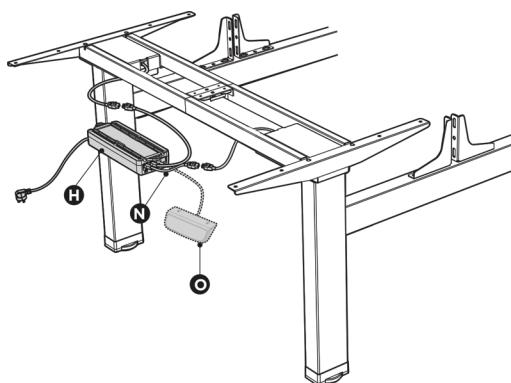


The arrow on the fixing plate indicates the direction of sliding in the control box. Follow the direction of the arrow to mount the control box.

Slide the control box to the center of the fixing plate.

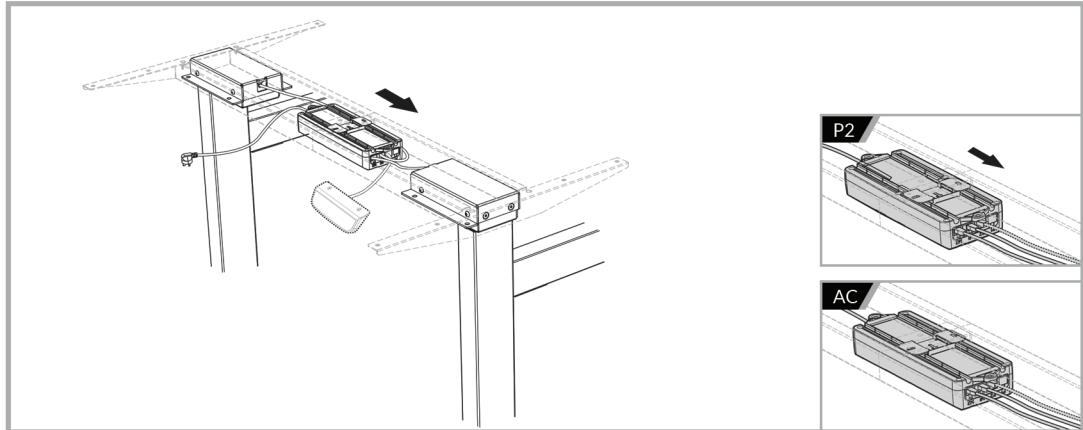

## Assembling the Cable Management Tray


Align the mounting holes on the tray hangers (J) with the screw holes on the cable management tray. Assemble the tray hangers to the cable management tray (E) with 4 screws (S-E) from below using a Philips screwdriver. Repeat the same process to assemble the other cable management tray.

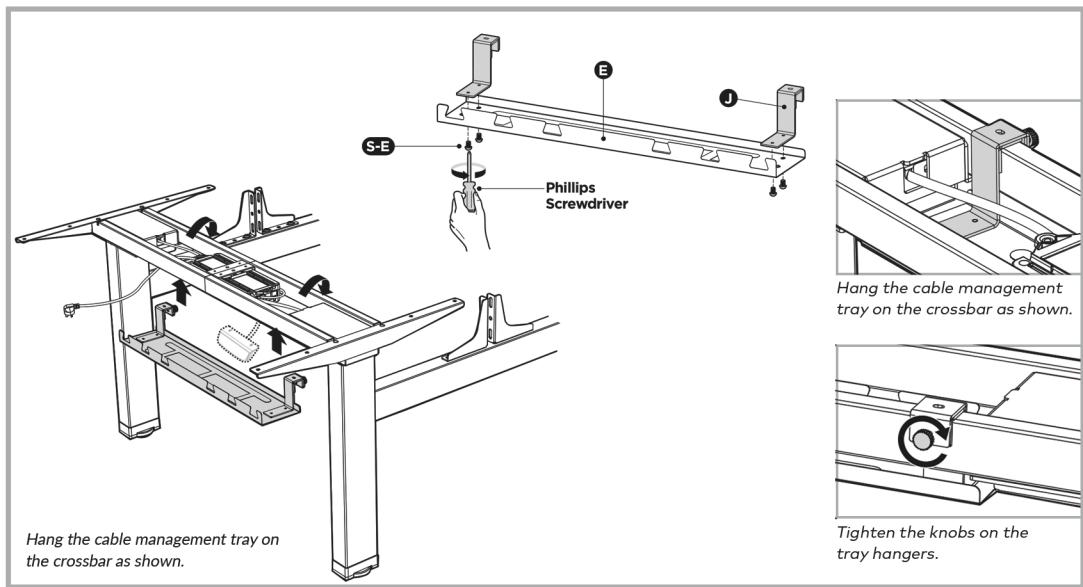

*Hang the cable management tray on the crossbar as shown.*

# 11 UVI Sit-Stand Double Frame


## Assembling the desktop

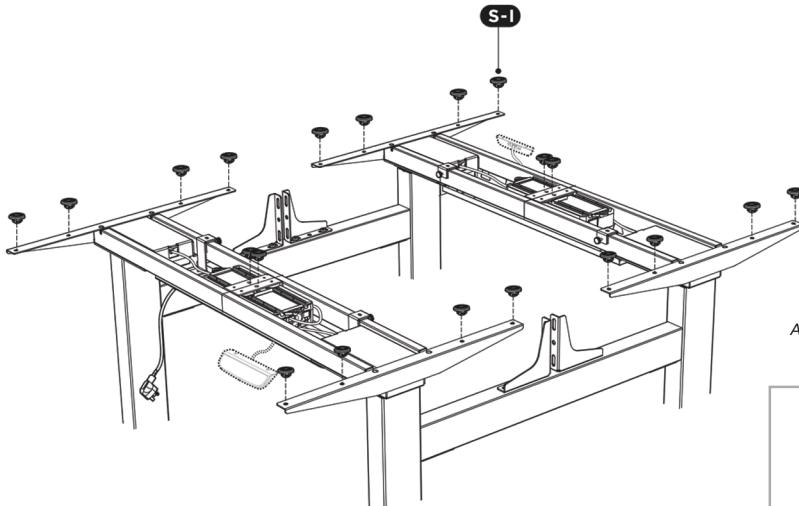

Attach the anti-vibration pads (S-I) to the surface of the crossbar on all twenty positions as shown.



S-I

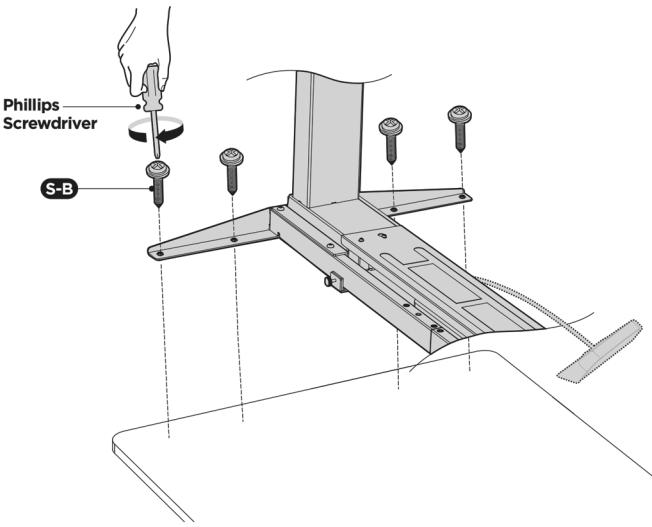




Phillips  
Screwdriver

S-B

Align the Previously drilled screw holes with the mounting holes on the crossbar. Insert and tighten the 4 screws (S-B) from below. Repeat the same process to tighten other three sides of the desktop.

## Assembling the Desktop

- Attach the controller to the desktop with 2 screws (S-C) using a driller.
- Stick the adhesive cable clip (S-H) under the desk to organize cords.
- Repeat the same process to assemble the other controller and cable clips.

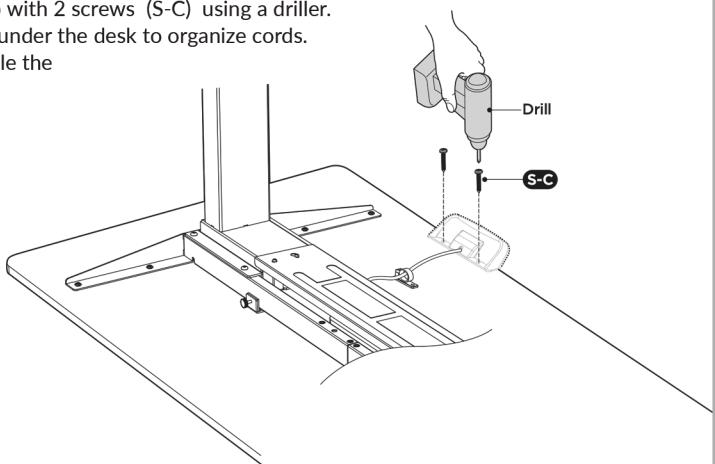

## Level Adjustment

There are two adjustable foot pads under each foot. If the floor isn't even, simply turn the pad to adjust the height until the desk is stable. Tip: Use a bubble level to check if the desktop is even.

